


- * Coat weld with epoxy touch up.
 ** See appropriate standard for rebar types and spacing pattern.

ELEVATION

Scale: $\frac{1}{2}" = 1'-0"$

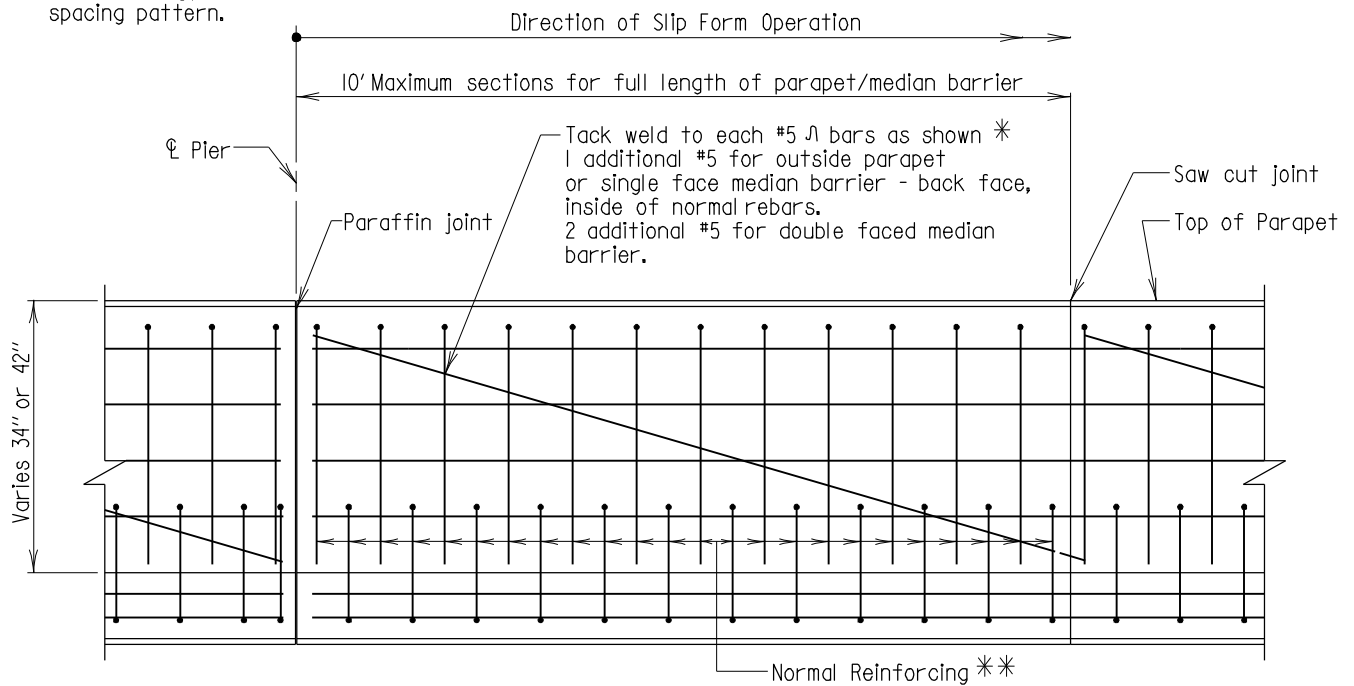

ELEVATION-MULTISPAN AT PIER

Scale: $\frac{1}{2}" = 1'-0"$

34" OR 42" PARAPET OR MEDIAN

Note:

1. All longitudinal bars shall be placed continuously in the parapet/median barrier from expansion opening to expansion opening in a simple span bridge and expansion opening to centerline of pier in a multi span bridge.

APPROVAL	
<i>E.S. Friedman</i>	DIRECTOR
OFFICE OF BRIDGE DEVEL.	
DATE: 2/17/94	
REVISIONS	
SHA	FHWA
10-22-03	.
.	.
FHWA APPROVAL	.
DATE:	.

STATE OF MARYLAND
 DEPARTMENT OF TRANSPORTATION
 STATE HIGHWAY ADMINISTRATION
 OFFICE OF BRIDGE DEVELOPMENT

ADDITIONAL REINFORCING FOR SLIP FORMING
 PARAPETS AND MEDIAN BARRIERS

STANDARD NO. BR-SS(6.4I)-94-297

SHEET 1 OF 1